



elock-300


## Features

**elock-300** electromagnetic locks offer cost effective solution with easy installation & suitable for variety of application . It has no moving parts thus keeping maintenance to a minimum.  
All types of brackets are available to ease installation for both in-swing & out-swing doors.

## Specification

- 300lbs holding force
- Dual voltage 12 & 24 Vdc
- Current drawn 330mA / 165mA
- MOV surge protection
- Fail-Safe type
- Miniature size suitable for small doors
- Dimension : -  
Magnet : 170(L) X 40(W) X 22(D) mm  
Armature Plate : 130(L) X 33(W) X 11(D) mm


## User Guide

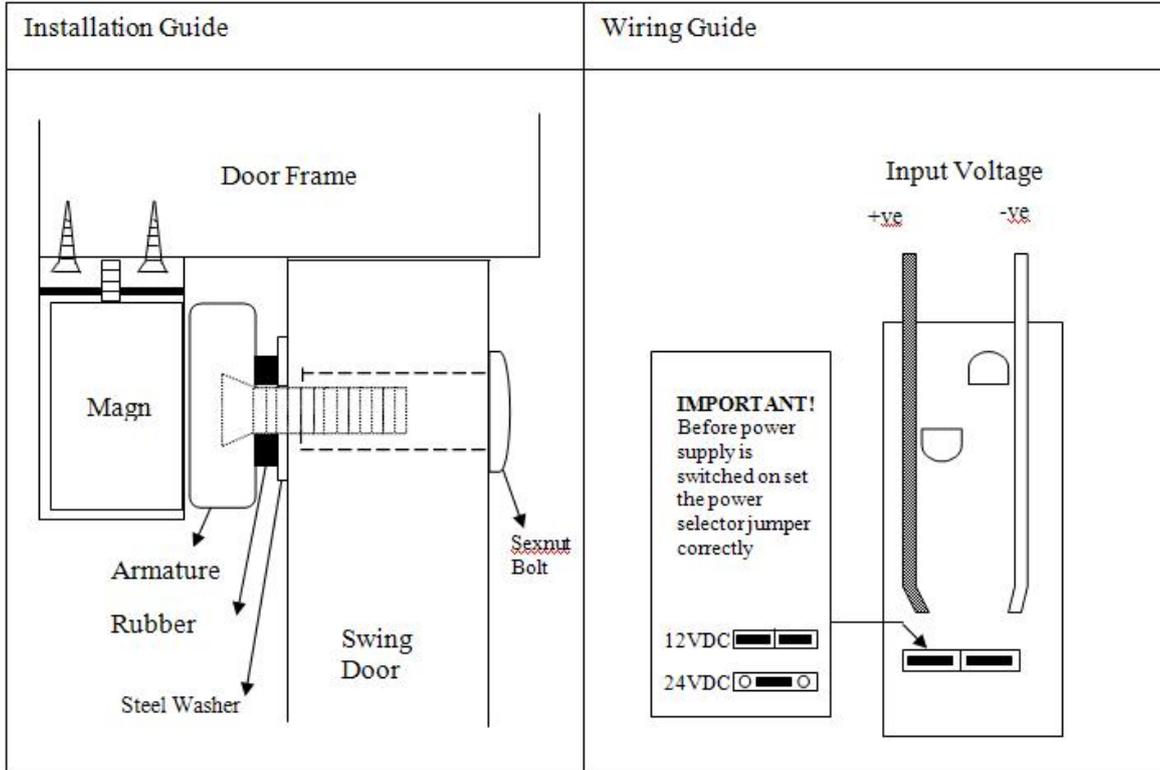

## Optional Brackets

### EL-BKL ( L Bracket )

- Adjustable "L" bracket for outward door when the header is narrow.
- Available for e-lock-300, 600 & 1200 Series

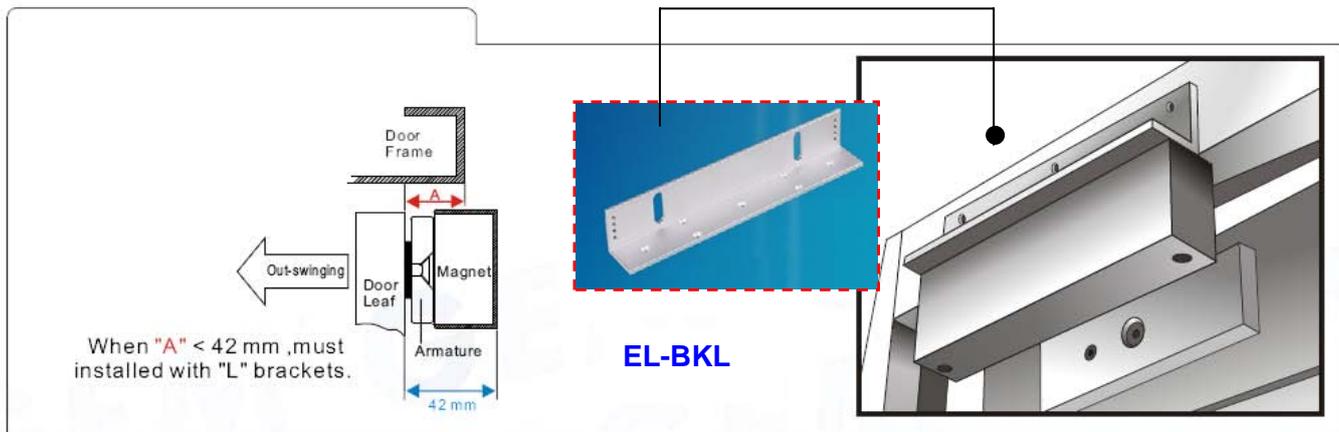


## EL-BKZ ( ZL Bracket )

- Adjustable "ZL" bracket for inward door application.
- Available for e-lock-300, 600 & 1200 Series application.



## EL-BKU ( U Bracket )


- Specially designed for glass door solution
- Available for e-lock-300 & 600 Series

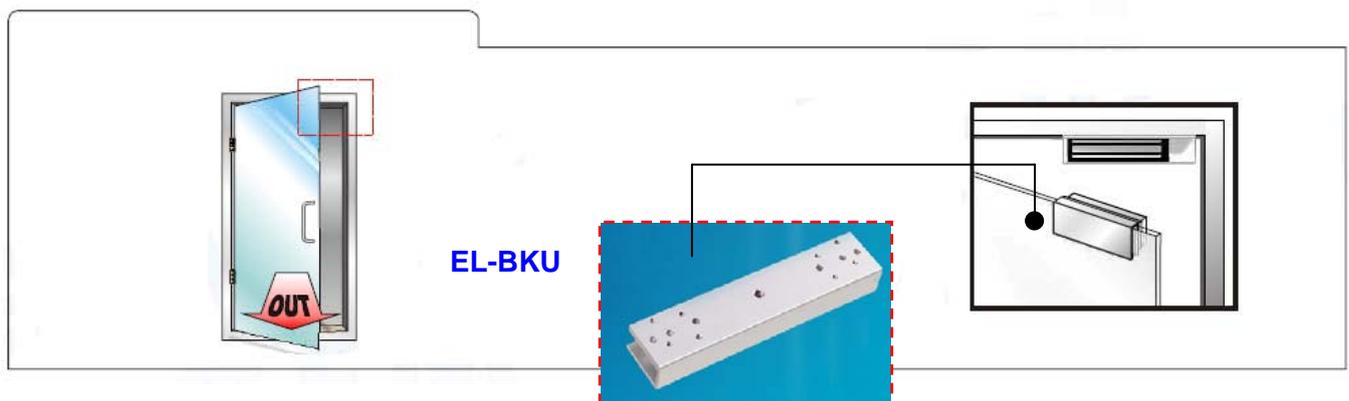

## Mounting Diagram


### Standard Mounting:

- With Filler Plate attached on top of EM Lock.

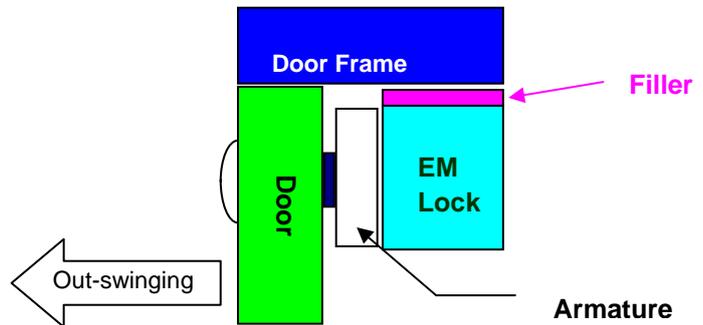

### L Bracket Mounting :

- Mounting with "Adjustable L Bracket" when Door frame is narrow.
- Mounting Procedure :-  
Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable L Bracket " set.

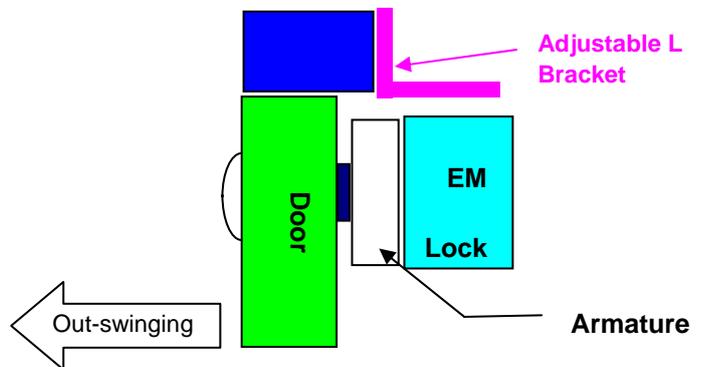

### ZL Bracket mounting :

- Mounting with " ZL Bracket " for In-swing door application.
- Mounting Procedure :-  
Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable ZL Bracket " set.

