



eLock-S310A

Features

Electric strikes generally come in two basic configurations:

Fail safe-D: The strike is fail safe this means if power is lost the strike will unlock




Fail secure-T: The strike is fail secure this means if power is lost the strike will remain in the locked position

eLock-S310A is fail safe & fail secure switchable strike lock (NO,NC adjustable)

Specification

- 12Vdc operation
- Fail Secure (NO) / Fail Safe (NC) Type (adjustable)
- Operation current 0.25mA±10%
- Holding Force : 200KG
- Dimension : 100mm(L) X 24mm(W) X 31.5mm(D)
- Face Plate : Stainless Steel
- Strike Structure : Zinc die-casting
- Opening Mode : 90° Swinging Door
- Working temperature:-40°C~+50°C
- Safety Approval :- **CE**

User Guide – Installation

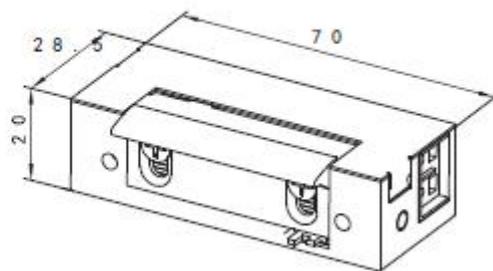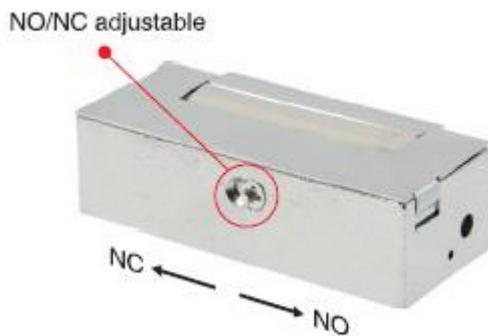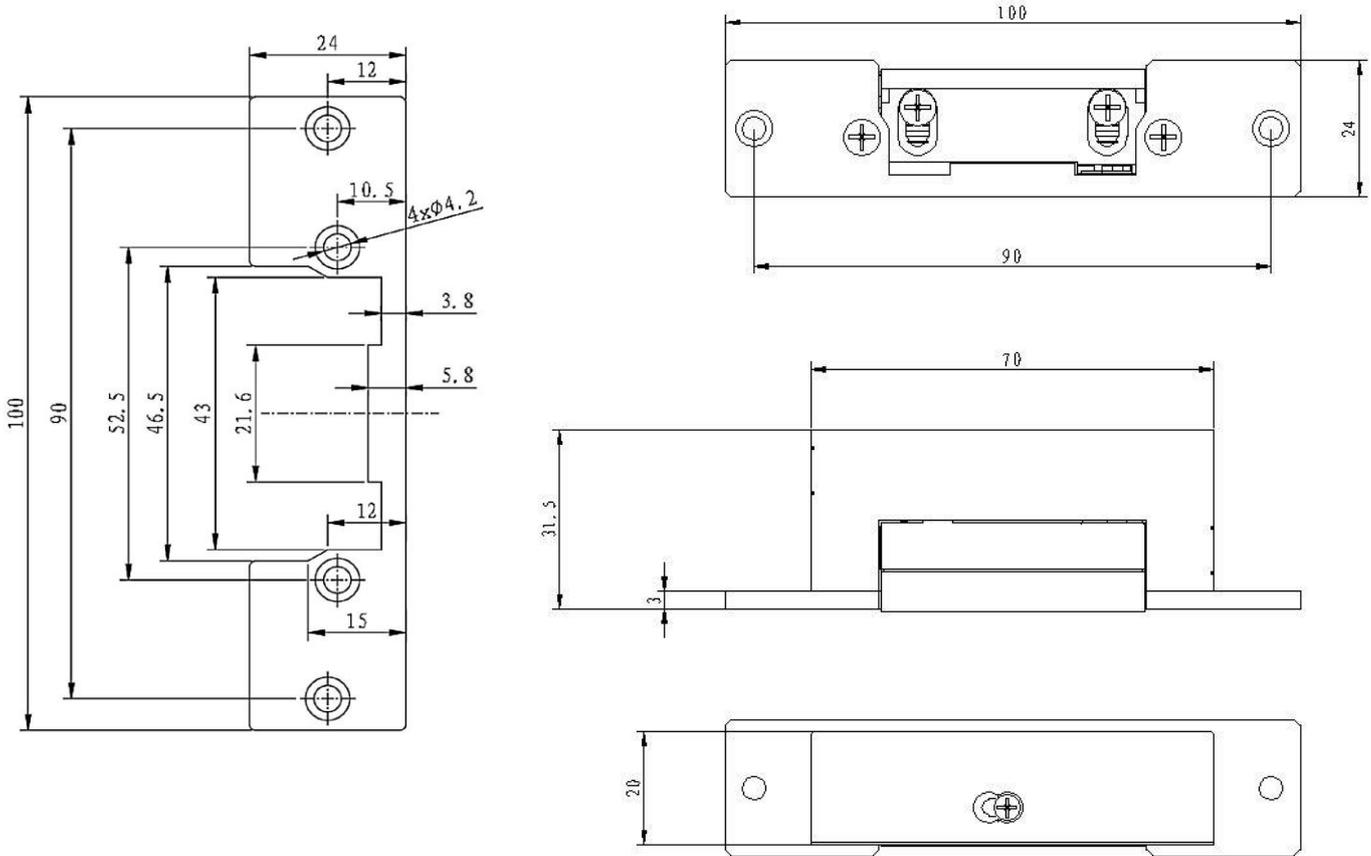

All dimensions in mm